



CBP40


Cover Available

Made in Taiwan


Electrical Rating	20A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3.5, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	12Kg/cm
Number of Poles	2P~30P
Pitch (terminal to terminal)	10mm

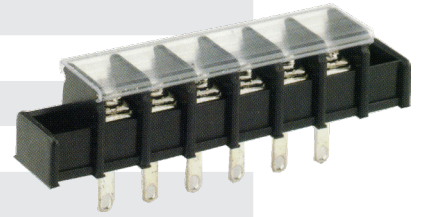


CBP40-01

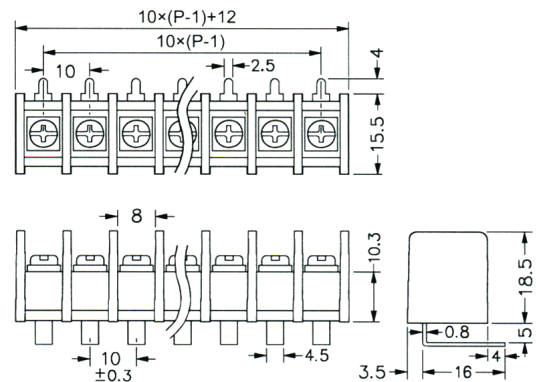


CBP40-02

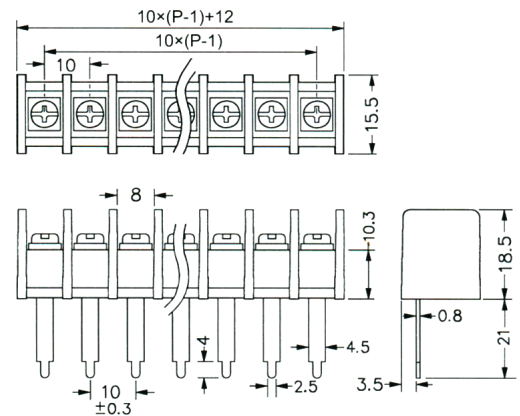


CBP40-03

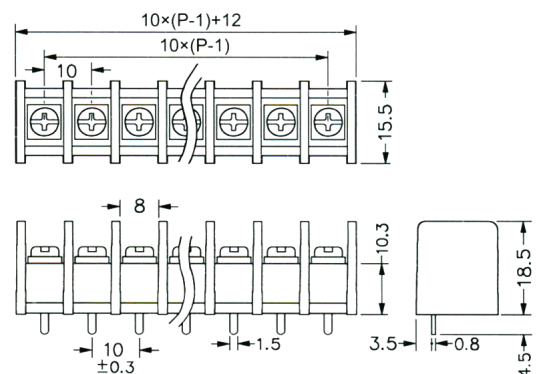





CBP40-04

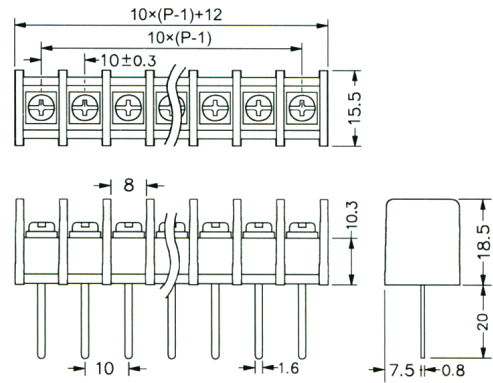

Unit : mm




CBP40-05

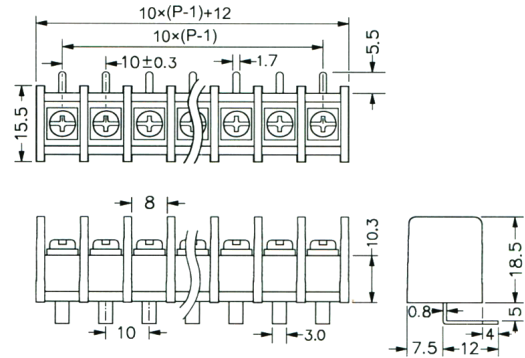


Unit : mm




CBP40-06

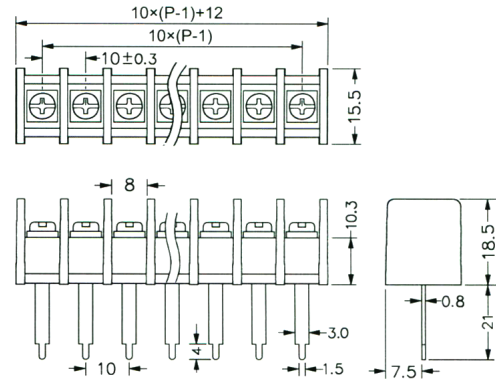


Unit : mm




CBP40-07

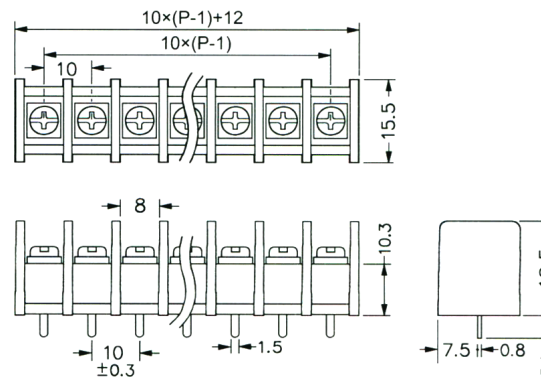

Unit : mm

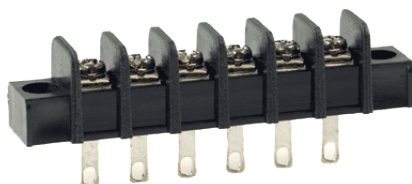

CBP40-08

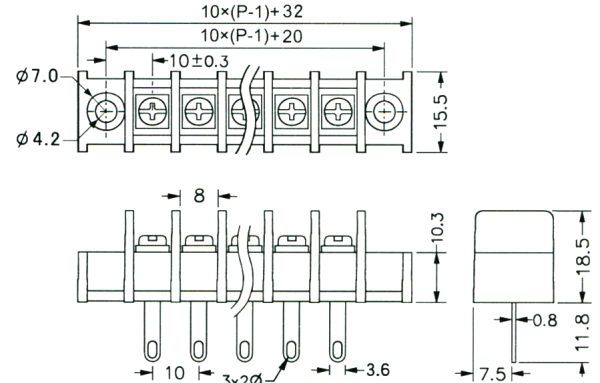

Unit : mm