



CBP70



Cover Available

Made in Taiwan



Electrical Rating	10A 300VAC
Housing Material	Plastic NYLON 66, Black (UL 94V-0)
Terminal	Brass, 0.8t Tin Plated
Screw	Steel, M3, Nickel Plated
Working Temperature	-40°C to +105°C
Insulation withstand Voltage	AC2000V at 1 min
Insulation resistance	500MΩ or more at DC 500V
Wire Range	22~12 AWG
Max. Torque Value	10Kg/cm
Number of Poles	2P~32P
Pitch (terminal to terminal)	7.62mm

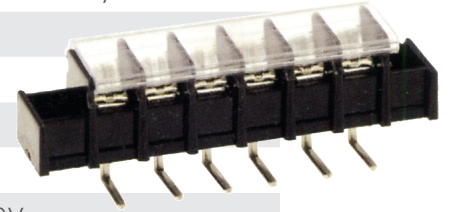


CBP70-01

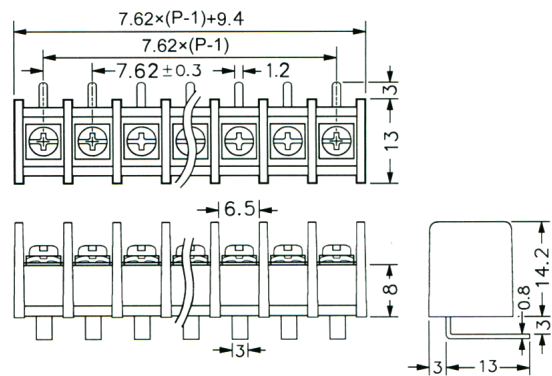


CBP70-02

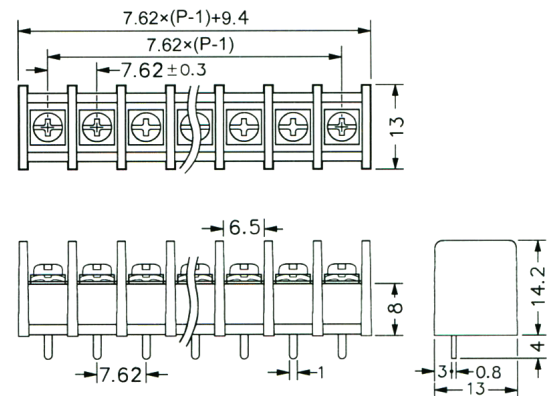


CBP70-03

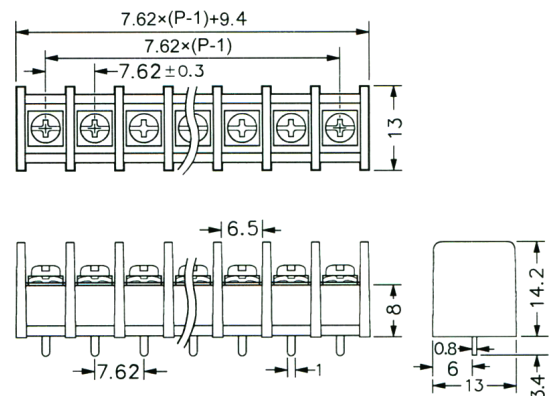






CBP70-04A

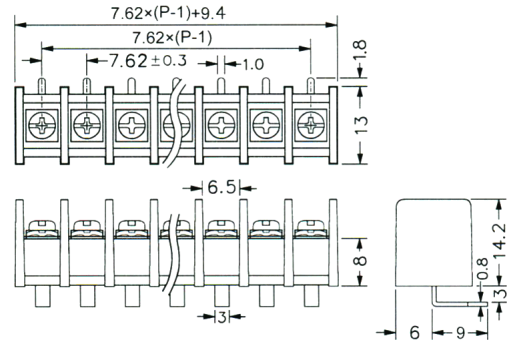


Unit : mm




CBP70-04B

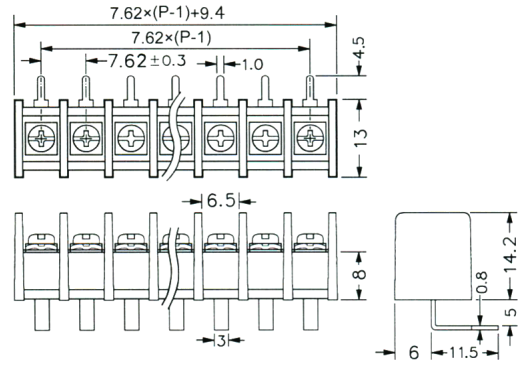


CBP70-05

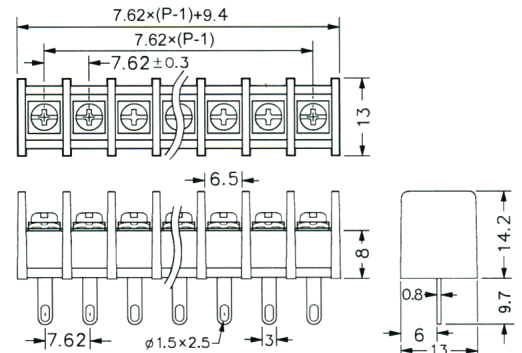


Unit : mm



CBP70-06

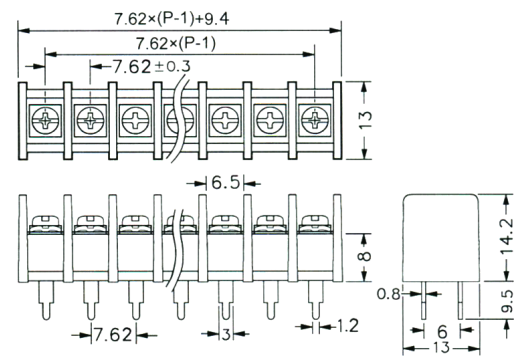

Unit : mm



CBP70-07

